


24-Port 10/100TX 802.3at PoE + 2-Port Gigabit TP/SFP Combo Managed Ethernet Switch



Cost-optimized Managed PoE+ Switch with L2/L4 Switching and Security

PLANET's newly-revised FGSW-2624HPS Layer 2 PoE+ Managed Switch is designed for enterprises and industries where a network of PDs can be centrally managed. The Switch's management functions have been enhanced to include intelligent PoE management, IPv6 management, ACL, GVRP, and more.

PLANET FGSW-2624HPS is an ideal Managed PoE+ Switch which provides cost-effective advantage to local area network and is widely accepted in the SMB office network. It offers **intelligent Layer 2 data packet switching and management functions, friendly web user interface and stable operation**. The model complies with **IEEE 802.3at Power over Ethernet Plus (PoE+)** at an affordable price; the FGSW-2624HPS is equipped with **24 10/100BASE-TX** Fast Ethernet ports and **2 Gigabit TP/SFP combo** interfaces with inner power system. Its **24** Fast Ethernet ports are integrated with 802.3at PoE+ injector function and total power budget of up to **220 watts**. It offers a rack-mountable, affordable, safe and reliable power solution for SMBs deploying Power over Ethernet networks, or requiring enhanced data security and network traffic management.

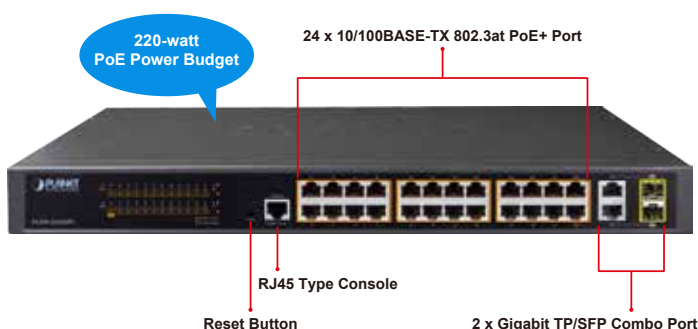

Physical Port

- **24-port 10/100BASE-TX** RJ45 copper with **IEEE 802.3at/af PoE+** injector
- **2-port 10/100/1000BASE-T** Gigabit RJ45 copper
- **2 1000BASE-X mini-GBIC/SFP slots**, shared with port-25 to port-26
- RJ45 console interface for switch basic management and setup
- Reset button for system factory default

Switching


- Hardware-based 10/100Mbps, half/full duplex and 1000Mbps full duplex mode, flow control and auto-negotiation, and auto MDI/MDI-X
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- IEEE 802.3x flow control for full duplex operation and back pressure for half duplex operation
- 9K jumbo frame
- Automatic address learning and address aging
- Supports CSMA/CD protocol

Power over Ethernet

- Complies with IEEE 802.3at Power over Ethernet Plus
- Complies with IEEE 802.3af Power over Ethernet
- Up to 24 ports of IEEE 802.3af/802.3at devices powered
- Supports PoE Power up to 30.8 watts for each PoE port
- 220-watt PoE budget
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 100m
- PoE Management
 - Total PoE power budget control
 - Per port PoE function enable/disable
 - Per Port PoE operation mode selection
 - Per PoE port power budget control
 - PD classification detection and PoE consumption usage status
- Intelligent PoE features
 - PD alive check
 - PoE port sequence
 - PoE schedule

Solution for IPv6 Networking

With the support for IPv6/IPv4 protocol, and easy and friendly management interfaces, the FGSW-2624HPS is the ideal choice for IP surveillance, VoIP and wireless service providers to connect with the IPv6 network. It also helps SMBs to step in the IPv6 era with the lowest investment and without having to replace the network facilities even though ISPs establish the IPv6 FTTx edge network.

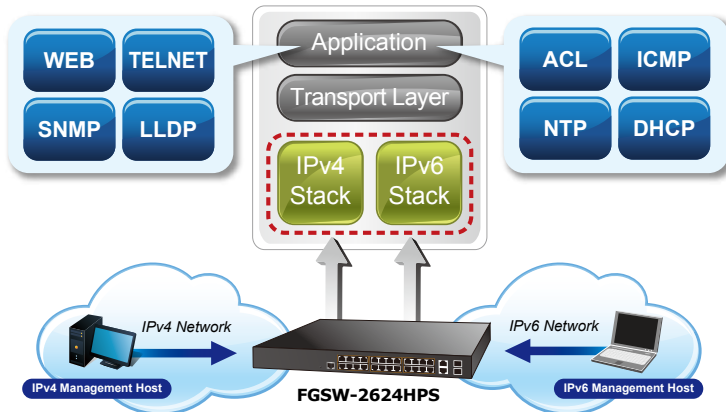


Built-in Unique PoE Functions for Surveillance Management

As a managed PoE Switch for surveillance network, the FGSW-2624HPS features the following intelligent PoE management functions:

- PD Alive Check
- PoE Port Sequence
- PoE Schedule

Intelligent Powered Device Alive Check

The FGSW-2624HPS can be configured to monitor a connected PD status in real time via ping action. Once the PD stops working and it is without response, the FGSW-2624HPS will resume the PoE port power and bring the PD back to work. It will greatly enhance the network reliability through the PoE port resetting the PD's power source, thus reducing administrator management burden.

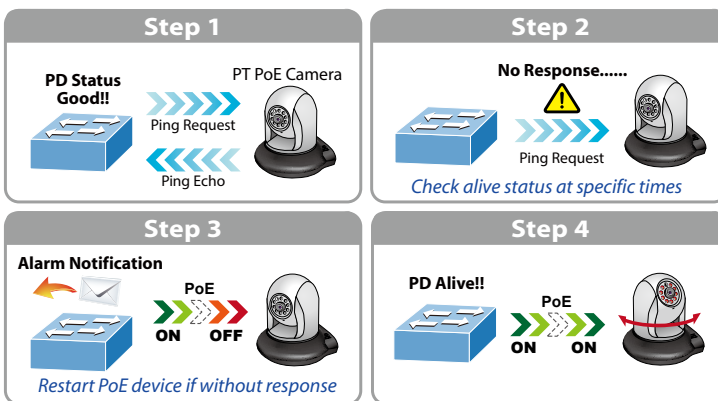

Layer 2 Features

- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full-duplex)
- High performance Store and Forward architecture, runt/CRC filtering eliminates erroneous packets to optimize the network bandwidth
- Supports **VLAN**
 - Port-based VLAN, up to 26 VLAN groups
 - IEEE 802.1Q tagged VLAN
 - Protocol VLAN
 - Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad)
 - GVRP
 - Voice VLAN
- Supports **Spanning Tree Protocol**
 - STP (IEEE 802.1D Spanning Tree Protocol)
 - RSTP (IEEE 802.1w Rapid Spanning Tree Protocol)
 - MSTP (IEEE 802.1s Multiple Spanning Tree Protocol)
 - STP BPDU Filtering, BPDU Protect
- Supports **Link Aggregation**
 - IEEE 802.3ad Link Aggregation Control Protocol (LACP)
 - 1 LACP group, up to 2 ports per LACP group
 - Cisco ether-channel (static trunk)
 - 1 trunk group, up to 2 ports per trunk group
- Provides port mirror (many-to-1)
- Loop detection

Quality of Service

- Ingress/Egress Rate Limit per port bandwidth control
- Storm Control support
 - Broadcast/ Multicast /DLF (Destination Lookup Fail)/ARP/ICMP
- Traffic classification
 - IEEE 802.1p Qos/CoS
 - TCP/UDP/DSCP/IP precedence of IPv4/IPv6 packets
- Strict priority and Weighted Round Robin (WRR) CoS policies

Multicast

- Supports IPv4 IGMP snooping v1/ v2 and v3
- Supports IPv6 MLD snooping v1, v2

Security


- Access Control List
 - IPv4/IPv6 IP-based ACL
 - MAC-based ACL
- Port-MAC-IP Address Binding
 - Port-MAC-IP Port Setting
 - Port-MAC-IP Entry Setting

PoE Port Sequence

To prevent all the PoE ports of the FGSW-2624HPS from being active at the same time when the Switch has booted up, the PoE ports of the FGSW-2624HPS can be configured to allow each port to be activated at an interval time. In addition, the “Delay” setting is to delay power feeding on each port when the FGSW-2624HPS has completely booted up.

PoE Schedule for Energy Saving

Besides being used for IP surveillance, the FGSW-2624HPS is certainly applicable to build any PoE network including VoIP and wireless LAN. Under the trend of energy saving worldwide and contributing to the environmental protection on the Earth, the FGSW-2624HPS can effectively control the power supply besides its capability of giving high watts power. The “PoE schedule” function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs and enterprises save energy and budget.

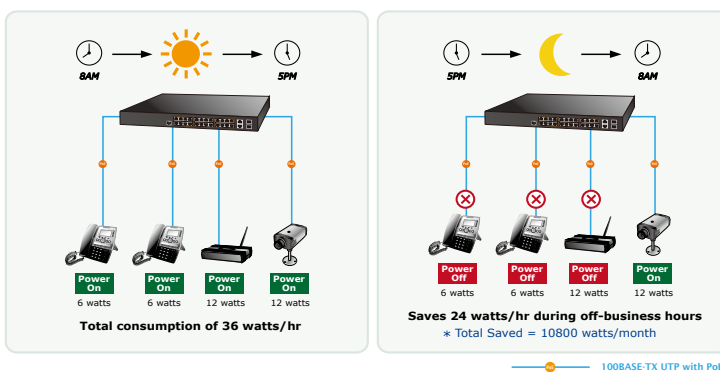


- MAC Address Binding
 - Static MAC
 - MAC Filtering
- DHCP snooping to filter distrusted DHCP messages
- ARP Inspection discards ARP packets with invalid MAC address to IP address binding

Management

- IPv4 and IPv6 dual stack management
- Switch management interface
 - RJ45 Console local management
 - Web switch management
 - Telnet command line interface
 - SNMP v1, v2c and v3
- BOOTP and DHCP for IP address assignment
- System maintenance
 - Firmware upgrade via HTTP
 - Configuration upload/download through web interface
 - Hardware-based reset button for system reset to factory default
- SNTP Network Time Protocol
- Link Layer Discovery Protocol (LLDP)
- SNMP trap for interface link up and link down notification
- Event message logging to remote Syslog server
- PLANET smart discovery utility

Robust Layer 2 Features

The FGSW-2624HPS can be programmed for advanced switch management function, such as **Multiple Spanning Tree Protocol (MSTP)** and BRDU Filtering/BPDU Guard, dynamic port link aggregation, **IGMP/MLD snooping**, DHCP Relay agent, loop detection and **GVRP**, voice VLAN and the **Link Layer Discovery Protocol (LLDP)**, the Layer 2 protocol included is to help discover basic information about neighboring devices in the local broadcast domain. Other features included are the port-based /802.1Q VLAN and **Q-in-Q VLAN**, Layer 2/4 QoS, port mirroring, broadcast storm control and bandwidth control.

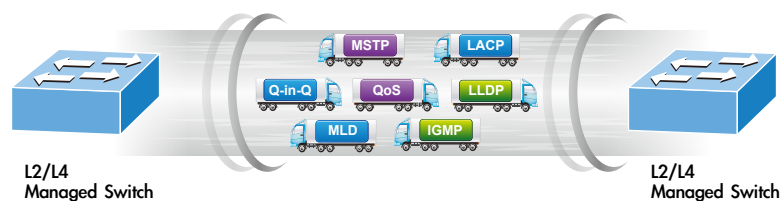

Enhanced Security and Traffic Control

The FGSW-2624HPS offers the comprehensive **Layer 2 to Layer 4 access control list (ACL)** for enforcing security to the edge. It can be used to restrict network access by denying packets based on source and destination IP/MAC address or defined typical network applications. The FGSW-2624HPS also provides **DHCP Snooping**, **ARP Inspection** and **MAC Verification** functions to prevent IP snooping from attack and discard ARP packets with invalid MAC address. Also included are per port MAC/IP address binding and MAC address binding. The network administrator can now build highly-secure corporate networks with considerably less time and effort than before.

Efficient Management

For efficient management, the FGSW-2624HPS is equipped with **console, Web, Telnet** and **SNMP** management interfaces. With the built-in Web-based management interface, the FGSW-2624HPS offers an easy-to-use, platform-independent management and configuration facility. By supporting the standard Simple Network Management Protocol (SNMP), the FGSW-2624HPS can be managed via any standard management software. For text-based management, the switch can be accessed via Telnet and the console port. Moreover, the FGSW-2624HPS offers secure remote management by supporting **SNMPv3** connections which encrypt the packet content at each session.


Flexible and Extendable Uplink Solution

The FGSW-2624HPS provides **2 extra Gigabit TP/SFP combo** interfaces supporting **10/100/1000BASE-T** RJ45 copper to connect with surveillance network devices such as **NVR, Video Streaming Server** or **NAS** to facilitate surveillance management. Or through these fiber SFP slots occupied by the **1000BASE-SX/LX** SFP (Small Form-factor Pluggable) fiber transceivers, it can be uplinked to a backbone switch and monitoring center in long distance. The distance can be extended from 550 meters (multi-mode fiber) to 10/20/30/40/50/60/70/120 kilometers (single-mode fiber or WDM fiber). They are well-suited for applications within the industrial data centers and distributions.

Applications

PoE IP Surveillance with Extended Network Infrastructure for SMBs / Workgroups


Providing 24 10/100BASE-TX PoE+ ports, in-line power interfaces and two Gigabit TP/SFP Combo interfaces, the FGSW-2624HPS can easily build an IP camera system for the enterprises where its power is centrally controlled. It can work with one 32-channel NVR to perform comprehensive security monitoring with 24 IP cameras via one Gigabit TP/SFP Combo port. The FGSW-2624HPS comes with non-blocking design, desktop size and SFP fiber-optic modules, bringing flexibility to building a network infrastructure at a low cost.

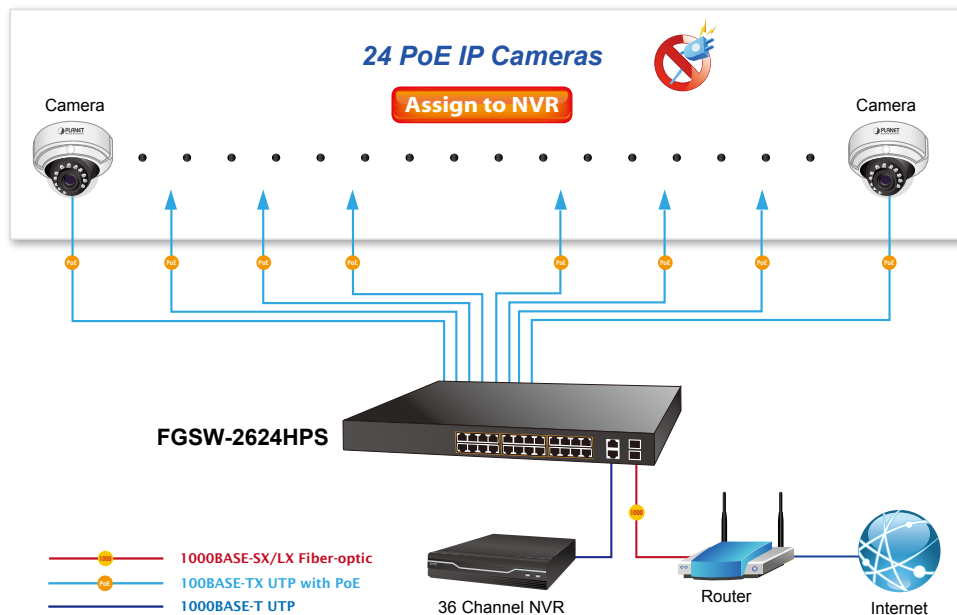

Department/Workgroup PoE Network

Providing 24 PoE in-line power interfaces, the FGSW-2624HPS can easily build a power that centrally controls IP phone system, IP camera system and wireless AP group for enterprises. The FGSW-2624HPS delivers full ports of 802.3af/at compliant Fast Ethernet network connectivity with high-performance and cost-effective advantages for the increasing number of PoE IP telephones, PoE IP cameras, PoE wireless access points and other devices applied at the edge of the small or medium enterprise network. The FGSW-2624HPS improves the network efficiency and protects the network clients with the powerful features:

- Layer 2 to Layer 4 security
- QoS/802.1Q VLAN/static trunk/LACP
- Multicast IGMP snooping

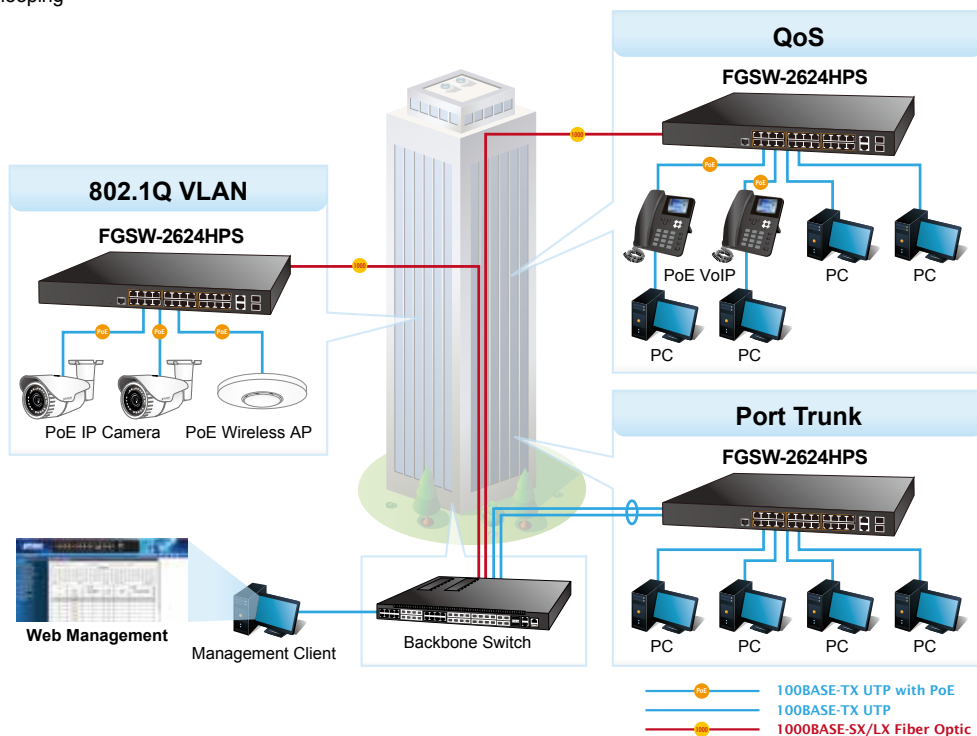

Specifications

Product	FGSW-2624HPS
Hardware Specifications	
Copper Ports	24 x 10/100BASE-TX RJ45 Auto-MDI/MDI-X ports
PoE Injector Port	24 802.3af/802.3at PoE+ injector ports
Gigabit Copper Ports	2 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
SFP/mini-GBIC Slots	2 1000BASE-X SFP interfaces, shared with Port-25 to Port-26
Console	1 x RS-232-to-RJ45 serial port (115200, 8, N, 1)
Switch Architecture	Store-and-Forward
Switch Fabric	8.8Gbps/non-blocking
Switch Throughput@64bytes	6.54Mpps @64bytes
MAC Address Table	16K entries
Shared Data Buffer	4Mbits
Flow Control	IEEE 802.3x pause frame for full-duplex Back pressure for half-duplex
Jumbo Frame	9216 bytes
Reset Button	> 5 sec: Factory default
LED	System: Power (Green) SYS (Green) 10/100TX RJ45 Interfaces (Port 1 to Port 24): 100 LNK/ACT (Green), PoE-in-Use (Orange) 10/100/1000BASE-T RJ45 / SFP Interfaces (Port 25 to Port 26): 1000 LNK/ACT (Green)

Thermal Fan	2
Power Requirements	100~240V AC, 50/60Hz, 5A (max.)
Power Consumption/Dissipation	Max. 254 watts/867 BTU
Dimensions (W x D x H)	445 x 207 x 45 mm (1U height)
Weight	2.7kg
Enclosure	Metal
Power over Ethernet	
PoE Standard	IEEE 802.3af Power over Ethernet/PSE IEEE 802.3at Power over Ethernet Plus/PSE
PoE Power Supply Type	Mid-span
Power Pin Assignment	4/5(+), 7/8 (-)
PoE Power Output	Per Port 52V DC, 300mA. Max. 15.4 watts (IEEE 802.3af) Per Port 52V DC, 600mA. Max. 30 watts (IEEE 802.3at)
PoE Power Budget	220 watts
Number of PDs, 7 watts	24
Number of PDs, 15.4 watts	14
Number of PDs, 30 watts	7
Layer 2 Functions	
Port Mirroring	TX/RX/both Many-to-1 monitor
VLAN	Port-based VLAN, up to 26 VLAN groups IEEE 802.1Q tagged VLAN - Up to 256 VLAN groups, out of 4094 VLAN IDs Protocol VLAN Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad) GVRP Voice VLAN
Link Aggregation	IEEE 802.3ad LACP supports 1 group of 2-port trunk and static trunk supports 1 group of 2-port trunk
Spanning Tree Protocol	IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) STP BPDU Filtering, BPDU Protection
IGMP Snooping	IPv4 IGMP snooping v1/ v2 and v3
MLD Snooping	IPv6 MLD snooping v1, v2
Access Control List	IPv4/IPv6 IP-based ACL MAC-based ACL
QoS	Ingress/Egress Rate Limit per port bandwidth control Storm Control support - Broadcast/ Multicast /DLF (Destination Lookup Failure)/ARP/ICMP Traffic classification - IEEE 802.1p Qos/CoS - TCP/UDP/DSCP/IP precedence of IPv4/IPv6 packets Strict priority and Weighted Round Robin (WRR) CoS policies
Security	Access Control List - IPv4/IPv6 IP-based ACL - MAC-based ACL Port-MAC-IP Address Binding - Port-MAC-IP Port Setting - Port-MAC-IP Entry Setting MAC Address Binding - Static MAC - MAC Filtering DHCP snooping to filter distrusted DHCP messages ARP Inspection discards ARP packets with invalid MAC address to IP address binding
Management Functions	
Basic Management Interfaces	IPv4 and IPv6 dual stack management Switch management interface - RJ45 Console local management - Web switch management - Telnet command line interface - SNMP v1, v2c and v3 BOOTP and DHCP for IP address assignment System maintenance - Firmware upgrade via HTTP - Configuration upload/download through web interface - Hardware-based reset button for system reset to factory default SNTP Network Time Protocol Link Layer Discovery Protocol (LLDP) SNMP trap for interface link up and link down notification Event message logging to remote Syslog server PLANET smart discovery utility
Secure Management Interfaces	SNMP v3
Standards Conformance	
Regulatory Compliance	FCC Part 15 Class A, CE

Standards Compliance	<p>IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3z Gigabit SX/LX IEEE 802.3ab Gigabit 1000T IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN tagging IEEE 802.1ab LLDP IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus RFC 2068 HTTP RFC 1112 IGMP version 1 RFC 2236 IGMP version 2 RFC 3376 IGMP version 3 RFC 2710 MLD version 1 RFC 3810 MLD version 2</p>
Environment	
Operating	<p>Temperature: 0 ~ 50 degrees C Relative Humidity: 5 ~ 95% (non-condensing)</p>
Storage	<p>Temperature: -10 ~ 70 degrees C Relative Humidity: 5 ~ 95% (non-condensing)</p>

Ordering Information

FGSW-2624HPS	24-Port 10/100TX 802.3at PoE + 2-Port Gigabit TP/SFP Combo Managed Ethernet Switch
--------------	--

Related Products

ICA-2250VT	Industrial PoE Plus Outdoor IR IP Camera
ICA-E3550V	5 Mega-pixel Bullet IR PoE IP Camera
ICA-E5550V	5 Mega-pixel Vandalproof IR PoE IP Camera
ICA-E8550	5 Mega-pixel Outdoor IR PoE Fisheye IP Camera
ICA-HM620	2 Mega-pixel PoE Plus Speed Dome Internet Camera
POE-162S	IEEE 802.3at Gigabit High Power over Ethernet Splitter
POE-E201	IEEE 802.3at Power over Ethernet Extender
WDAP-1750AC	1750Mbps 802.11ac Dual Band Wall-mount Enterprise Wireless Access Point
ICF-1800	HD Touch Screen Android Multimedia Conferencing Phone

Available 1000Mbps Modules

MGB-GT	SFP-Port 1000BASE-T Module
MGB-SX	SFP-Port 1000BASE-SX mini-GBIC module - 550m
MGB-SX2	SFP-Port 1000BASE-SX mini-GBIC module - 2km
MGB-LX	SFP-Port 1000BASE-LX mini-GBIC module - 10km
MGB-L40	SFP-Port 1000BASE-LX mini-GBIC module - 40km
MGB-L80	SFP-Port 1000BASE-LX mini-GBIC module - 80km
MGB-L120	SFP-Port 1000BASE-LX mini-GBIC module - 120km
MGB-LA10	SFP-Port 1000BASE-LX (WDM,TX:1310nm) mini-GBIC module - 10km
MGB-LB10	SFP-Port 1000BASE-LX (WDM,TX:1550nm) mini-GBIC module - 10km
MGB-LA20	SFP-Port 1000BASE-LX (WDM,TX:1310nm) mini-GBIC module - 20km
MGB-LB20	SFP-Port 1000BASE-LX (WDM,TX:1550nm) mini-GBIC module - 20km
MGB-LA40	SFP-Port 1000BASE-LX (WDM,TX:1310nm) mini-GBIC module - 40km
MGB-LB40	SFP-Port 1000BASE-LX (WDM,TX:1550nm) mini-GBIC module - 40km

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
 Tel: 886-2-2219-9518 Fax: 886-2-2219-9528
 Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2018 PLANET Technology Corp. All rights reserved.

FGSW-2624HPS